

TECHNICAL FEATURES

It is a system with double lever for deck mounting with limited external dimensions and with a simple and modern style. All the mechanism is under the desk and it is available with interlock system between the throttle and


the gearbox. It is also available with an adjustable friction on both levers. The internal mechanism allows a serial connection between two command stations.

Material used: stainless steel.


1	DESCRIPTION	CODE
	Control lever Series 590 mixed right	0590-MDX-INOX
	Control lever Series 590 mixed right with interlock	0590-MDX-INT
	Control lever Series 590 mixed left	0590-MSN-INOX
	Control lever Series 590 mixed left with interlock	0590-MSN-INT
	Control lever Series 590 double throttle	0590-DGS-INOX
	Control lever Series 590 double gearbox	0590-DIN-INOX



INSTALLATION SCHEME WITH ONE COMMAND STATION

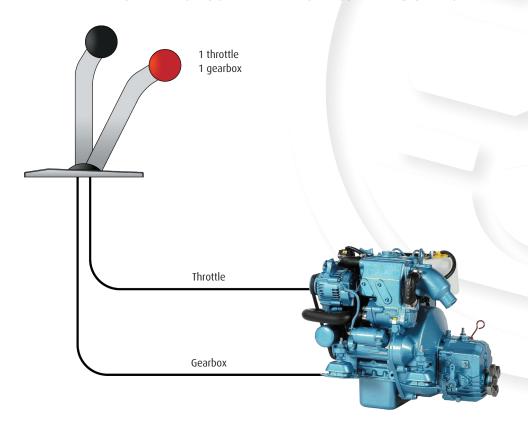

INSTALLATION SCHEME WITH TWO COMMAND STATIONS

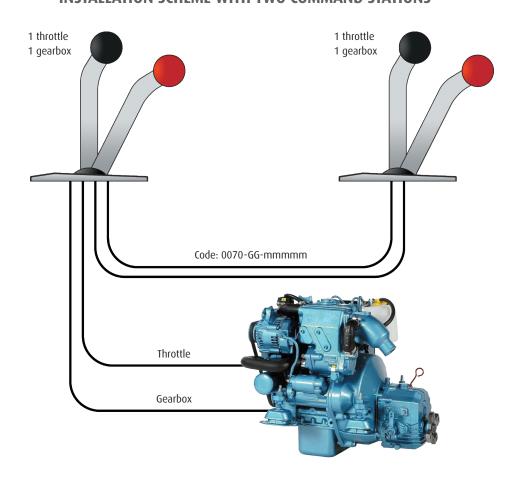


Note:


mmmmm is the length in mm



DIMENSIONS, FOOTPRINTS AND DRILLING MASKS

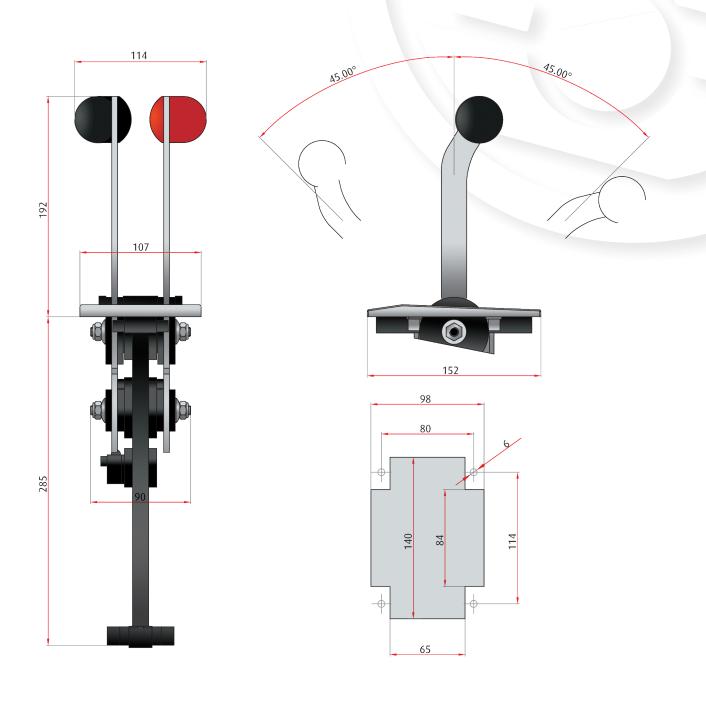



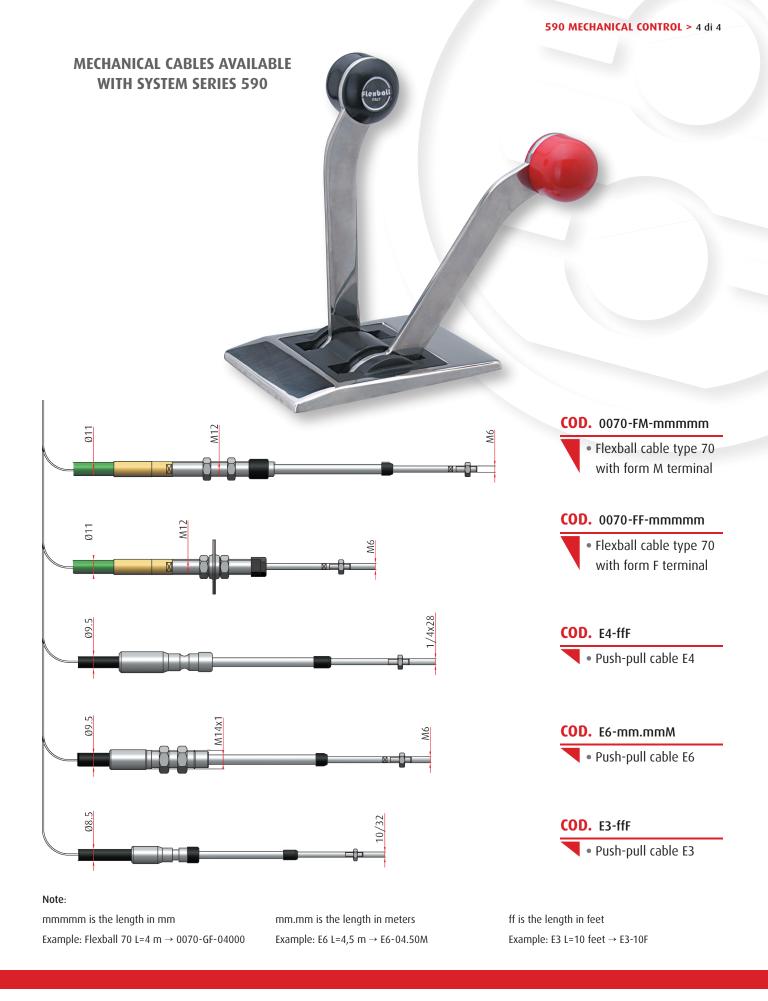

Flexball Italiana S.r.l.

Via San Luigi 13/A - 10043 Orbassano (To) - Italy

Tel 0039.011 90.38.900 - Fax 0039.011 90.38.747 info@flexballitaliana.com

www.flexballitaliana.com

